



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 649 102 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
17.05.2000 Bulletin 2000/20

(51) Int. Cl.⁷: **G06F 17/00**, A63F 13/00
// G06F161:00

(21) Application number: **94307570.5**

(22) Date of filing: **14.10.1994**

(54) Interactive system and method

Interaktives System und Verfahren

Système et procédé interactif

(84) Designated Contracting States:
**AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL
PT SE**

(30) Priority: **15.10.1993 GB 9321312**

(43) Date of publication of application:
19.04.1995 Bulletin 1995/16

(73) Proprietor: **Two Way TV Limited**
Avonmore Road, London W14 8TS (GB)

(72) Inventors:
• **Woodfield, David Alan**
Bloxwich, Walsall WS3 3RX (GB)
• **Weston, David Robert**
London NW3 3NR (GB)
• **Mrsic-Flogel, Janko**
London N11 3NR (GB)
• **Pfanner, Peter James**
London SW15 1QG (GB)
• **Hollington, Jeffrey Arnold**
London N6 5UD (GB)

• **Emrys-Roberts, Peter**
London SE1 7BL (GB)
• **Levy, David Neil Laurence**
London NW3 2LP (GB)

(74) Representative:
Skone James, Robert Edmund et al
GILL JENNINGS & EVERY
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)

(56) References cited:
EP-A- 0 310 368 **EP-A- 0 405 776**
WO-A-89/06405 **WO-A-91/08810**
GB-A- 2 197 971 **US-A- 4 587 510**
US-A- 4 719 455 **US-A- 4 864 272**

• **IBM TECHNICAL DISCLOSURE BULLETIN, vol.**
28, no. 9, February 1986, NEW YORK, pages
4093-4097, XP002001079 "Cursor
Controller/Graphics Pad"

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 649 102 B1

Description

[0001] This invention relates to an interactive system, in particular for use with mass media broadcasts.

[0002] Interactive systems are known, for example in a game playing system where a large number of users at different remote positions enter predictions relating to a mass media broadcast, e.g. scores or future moves in a football game, by way of a temporary connection along a telecomms line to a central controller. A lock-out function is provided to prevent the user entering a prediction after the time of occurrence has passed for the predicted event. The temporary connection is made as a confirmation of a correct prediction or total score, rather than transmitting every prediction to the central processor initially. In these known systems each player needs their own telephone link and a control set which includes complex and expensive circuitry. Groups of players in the same location must each have a control set to participate.

[0003] A more sophisticated example is described in EP-A-0405776 (US-A-5083800) in which a game is run on individual personal computers (PC) and a mass broadcast is used to alter the parameters of the game for multiple users PC's simultaneously. The user can send a score or result at the end of the game. However, this game involves the user in considerable outlay to obtain his own personal computer and related equipment.

[0004] WO91/08810 relates to a method of evaluating data to determine winners of the game by applying statistical analysis to define which results need to be read.

[0005] In accordance with one aspect of the present invention, an interactive system for use with mass media broadcasts comprises a local controller operable to control data flow to and from at least two local handsets for generating data, the local controller including a store for storing data and processing means; a central controller for broadcasting data to the local controller, the local controller being connectable to the central controller to communicate data to the central controller; and a display for displaying locally both the mass media broadcast from the central controller and data received from the local controller, wherein the local controller stores data generated by each local handset and selectively transfers stored data to the central controller.

[0006] The system of the present invention enables several users to participate at the same remote location with a local controller and communication to a central controller host, with other remote users at a different location and also to operate the system locally.

[0007] Preferably, the processing means of the local controller addresses each local handset sequentially in accordance with a predetermined schedule to obtain data from that handset.

[0008] The predetermined schedule may poll each handset and immediately move onto the next handset if

no response is obtained, but preferably the predetermined schedule requires each handset to be polled for an equal time period.

[0009] The local controller may be preprogrammed during manufacture or store data input locally, but preferably the local controller is adapted to store data supplied from the central controller.

[0010] A unique identifier by which each handset is addressed may be embedded in each handset during manufacture or allocated to each handset at the start of each use, but preferably a unique identifier is allocated during the first use of a handset within the system or thereafter.

[0011] The local controller and central controller may be connected, for example, via a telecomms link, or a data distribution network.

[0012] The central controller may provide video and text data via the telecomms link, but preferably, the central controller broadcasts video and text data for reception by the local controller and for display on the display.

[0013] Preferably, the transfer of data between each handset and the local controller is via an infrared link. This allows users to position themselves around the room rather than being limited by fixed length cable, although wires operating to transfer data in parallel could be used or parallel transfer by modulating the infrared signal would allow all handsets to operate at the same time.

[0014] Typically, the local controller selectively transfers data to the central controller only if a predetermined transfer condition is met.

[0015] When used for game playing, the predetermined transfer condition may be that a particular time has not yet expired since the end of the game to transfer a score, or that an upper limit on the number of participants transferring their score has not yet been reached, but preferably it comprises the user's score exceeding a predetermined score value at the end of a game play period. Thus, only participants with a reasonable chance of winning go to the expense of registering their score over the telecomms link.

[0016] Preferably, the processing means of the local controller only transmits data to the central controller in response to a command from the central controller.

[0017] Preferably, the command is broadcast by the central controller along with the video and text data.

[0018] Preferably, a second local controller operable to control data flow to and from respective second handsets is provided such that data may be transferred between the first and second local controllers via the central controller. This has the advantage that players at remote locations can compete directly, or shops can deal with customer's enquiries and orders remotely.

[0019] Each handset may comprise a transmitter and a receiver for transfer of data between the handset and the local controller; input means to input data for controlling the output of the display via the local controller; and means for sensing a position of a cursor on the

display.

[0020] Preferably, the input means comprise a cursor control laterally movable over a plane; and the means for sensing a position of the cursor control within the plane cause the cursor on the display to take up a similar position.

[0021] Examples of how the cursor on the display can be controlled include using buttons on the handset or a flat puck type cursor control.

[0022] Preferably, the sensing means monitor a change in potential difference with a change in position of the cursor control.

[0023] The interactive system may comprise, for example, one of a game playing system, a purchase system and an information system.

[0024] In accordance with another aspect of the present invention, a method of operating an interactive system according to the first aspect comprises broadcasting first data from the central controller whereby the local controller responds by causing the display to display the broadcast first data; storing second data in the local controller obtained from each local handset relating to the first data; displaying locally data received from the local controller; and selectively transferring the stored second data to the central controller if predetermined conditions are satisfied.

[0025] Preferably, the first data comprises game playing information and the second data comprises data relating to the playing of the game.

[0026] Preferably, the predetermined conditions are supplied to the local controller by the central controller as part of the game playing information broadcast.

[0027] Typically, the predetermined conditions include a minimum score value, the local controller comparing each stored score with the minimum score value and only transferring a stored score to the central controller if the stored score is the same as or exceeds the minimum score value.

[0028] In one example, the central controller maintains a ranking order for units which have previously recorded scores and defines an upper portion of the ranking order from which units are chosen to transmit their scores.

[0029] Preferably, the control controller allows a first group of scores to be transmitted, then sets one or more further group sizes until the desired number of scores which comply with the predetermined condition is achieved.

[0030] Examples of a system and a handset in accordance with the present invention will now be described with reference to the accompanying drawings, in which:-

Figure 1 illustrates the configuration of one example of the system;

Figure 2 illustrates a local unit for the system of Figure 1;

Figure 3 is a block diagram of a local controller for

use in the system of Figure 1;

Figure 4 is a block diagram of a handset for use in a system of Figure 1; and,

Figure 5 is a plan view of the cursor of Figure 5.

[0031] An example of the system of the present invention when used in a game playing system is shown in Figure 1. The system comprises a central controller 1 at a central location, for example a TV studio. This central controller comprises a computer system 2 which controls the broadcast of mass media broadcast over a data distribution network 3 and one or more transmitters 4. In an example where the central controller is operating in conjunction with a game show for TV broadcast there may be one or more game terminals 5 connected to the computer system 2 for the game operators to operate. A modem 7 between the computer system 2 and the public telephone network (PTN) enables users at remote locations to transmit data to the central controller 1.

[0032] Remote local units 6 comprise a local controller 8, a receiving aerial 9 for receiving broadcasts from the transmitter 4 and a modem 10 to output data from the local controller 8 to the central controller 1 over the PTN. Two or more local handsets 11,21,22 are provided in conjunction with each local controller 8.

[0033] The local unit 6 is shown in more detail in Figure 2. As can be seen, the local controller 8 is connected to a monitor 12, such as a conventional television set. Broadcast information and programmes from the central controller 1 are received by the aerial 9 and fed via the local controller 8 to the monitor 12 for display. For example, the broadcast could include a game programme which is displayed in a conventional manner. In addition, the central controller transmits data for controlling operation of the local controller 8 and other information used by the local controller. This is received via the RF antenna 9 and stored in an updatable memory, e.g. flash ROM 35. Datacast transmissions from the central controller appear on the top few lines 13 of the display. In another example (not shown), the broadcast information could be supplied by a dedicated data broadcast channel or multiplexed with a cable channel.

[0034] The local controller 8 is connected to four remote handsets 11,21-23 each of which is operated by an individual player. The local controller 8 causes at least one cursor 14 to be displayed on the monitor 12, the position of the cursor being controllable by a selected one of the handsets 11,21-23. In some examples, four cursors could be displayed, one for each handset.

[0035] The construction of the local controller 8 is shown in more detail in Figure 3. As can be seen, the RF antenna 9 which receives data broadcast from the central controller is connected to a video channel tuner 19 and a datacast/teletext front end tuner 20 which separate the incoming broadcast signals into video and datacast/teletext signals respectively. The extracted video

signals are fed to an overlay module 30 and are then output to the monitor 12 via the video out for display. Corresponding sound transmission is extracted by the TV modulator 33 and output via the RF output. In this way, a conventional broadcast television programme can be viewed on the monitor 12.

[0036] Where the system is operating and is generating datacast or teletext signals for controlling operation of the local controller 8, these, having been separated from the incoming signal, are extracted by an extractor circuit 24 and fed to an I/O microprocessor 25 from where they are fed to a CPU 26.

[0037] The I/O microprocessor 25 is also connected to an infrared communicating device 27 for communicating with the remote handsets 11,21-23, output data from the communicating device 27 being fed via the I/O microprocessor 25 to the microprocessor 26, for example a 68000 processor. Data received from the handsets which is for controlling a cursor on the monitor 12 is stored in memory 28, typically conventional random access memory (static, dynamic, etc.) which can be multiplexed to provide access for both the local CPU 26 and display controller 29, or video RAM. (This store also stores system data or games). This data is then fed by a display controller 29 of conventional form to the overlay module 30 where it is overlaid on the broadcast video from the tuner 19 before being output in a combined form on the monitor 12.

[0038] The local controller 8 is powered by mains voltage. Once installed the system is not switched off, but the screen display is no longer visible after a particular period of non-use. The operating system software is stored in the flash ROM 35 and when the handset is used again the software is able to respond immediately. Also if the system has been unplugged it is the software from this memory 35 which will be ready to operate when plugged in again. A read only memory 31 stores a boot-up programme for initialising the microprocessor 26. This is generally only when first manufactured or if the code is corrupted for some reason. The software code for the system is structured in multiple levels. In one example, these are BIOS, operating system, graphics kernel, windowing system, interpreter and applications programmes. Any type of application can be run by down-loading alternative operating systems and programs from the central controller 1. Programmes for operating the microprocessor 26 are stored in the store 28 and can be updated or changed by downloading suitable data from the central controller to the aerial 9 etc. This may occur, for example, at the beginning of a broadcast game show or separately during manufacture or by the owner loading the programme himself. In any event, at the commencement of the broadcast programme, the local controller microprocessor 26 is caused to run the appropriate programme. The advantage of preloading the programme is that only small bursts of real time game data need to be transmitted thereafter which maximises the use of the limited band-

width available.

[0039] The microprocessor 26 is also connected to a modem 32 which in use is connected to a conventional telephone socket for transmitting data in the manner to be described below.

[0040] A block diagram of the components of a typical handset 11 is shown in Figure 4. The handset comprises a single chip microprocessor 17 connected to an infrared interface circuit 18 which receives and generates infrared signals so as to receive data from and transmit data to the IR communication device 27 of the local controller 8. A cursor control 16 to be described in more detail below is connected to the microprocessor 17 as is a conventional key pad formed by a set of push buttons indicated at 15. The cursor 14 on the display may be controlled using keys on the key pad as an alternative to the cursor control 16 described. Optionally, an LCD display 34 may be provided for displaying text and graphics relating to a game.

[0041] An example of the construction of the cursor control is shown in Figure 5. The cursor control includes a housing 50 forming part of the handset, the remainder of which is not shown, the housing 50 including a rectangular frame 51 having a base 52 and a cursor arm mounting arrangement 53 on which a cursor arm assembly 54 is mounted. The assembly 54 includes a stylus member 55 having an elongate leg 56 on the end of which is mounted a cursor control puck 57, coupled by an electrically conducting arm 58, to a horizontally mounted potentiometer 59. A vertically mounted potentiometer 60 is provided with an arm 61 in which a slot 62 is formed. A pin 63 connected to the base of the cursor control puck 57 is free to move in contact with the arm 61 in the slot 62. Rotation of the respective arms of the potentiometers causes an alteration in potential difference which is converted to position indication information for transmission to the local controller 8. The local controller then causes the cursor 14 on the display screen to move.

[0042] The space 52 within the frame 51 may be provided with graphics information such as a grid to enable the user to position the cursor assembly accurately.

[0043] As the cursor assembly 54 is moved relative to the housing 50 by the user moving the cursor control puck 57 laterally across the base 52, this movement is tracked by an equivalent movement of the pin 63 within the slots 62 and 64. The microprocessor 26 processor the voltage sensed by each potentiometer and converts it to a suitable signal for controlling the position of the cursor 14 on the display 12.

[0044] In operation, the IR communication system 27 polls each of the handsets 11,21-23 in turn. The microprocessor 26 causes the system 27 to turn an infrared source (not shown) off and on so as to generate an information carrying signal which is detected by each of the IR interface circuits 18 of the handsets 11,21-23. Direct switching is preferable to increase the transmissi-

ble data rate without the need for a more complex receiving circuit in each handset which would be required in order to decode a higher data rate encoded on a carrier. The pulsed signal is interpreted as a binary code which can be decoded by the microprocessor 17 and data transmitted in parallel. As an alternative, an infrared carrier could be modulated.

[0045] Interference between the infrared data stream from the handset or local controller, with conventional remote control units, such as TV controllers, is avoided by not encoding the data-stream on a carrier in the conventional manner. This also ensures that the local controller does not react to a command from a conventional TV remote control unit.

[0046] Each handset is given a unique identifier. This can be embedded at the time of manufacture, entered by the user or distributed by the local controller to each handset in turn when the unit is first switched on. The poll signal consists of two information fields, a) the handset unique identifier and b) an acknowledgement field which indicates that the received data from the specified handset on the previous poll of that handset was received correctly.

[0047] In a preferred implementation, an acknowledgement bit is toggled by the local controller 8 on a correct reception so that the sending handset 11 can tell whether the data was received intact rather than simply missed due to an intermittent obstruction of the data stream, e.g. a chair leg in the way.

[0048] If a handset having a polled identifier is present i.e. not switched off or out of range, it responds to the polling signal if it has data to send due to a change in status since the last time it was polled, or because the last data transfer of information attempted has not been correctly acknowledged. If there is no data to send the handset does not respond and the central controller polls the next handset in line in accordance with its predetermined sequence. When all the handsets 11,21-23 have been polled the local controller 8 begins again with the first one. It will be noted that each handset 11,21-23 only transmits data to the local controller 8 if that data has changed from the previous transmission. This conserves power.

[0049] The type of data transmitted by the handset can include cursor assembly position information (the X,Y data from the cursor control 16) which is used by the local controller 8 to adjust the position of a displayed cursor 14, and/or data from the key pad 15.

[0050] The length of data packets transmitted may be varied to allow different types of data to pass between the handset 11 and the local controller 8, e.g. button pushes, joystick (if one is provided) or track ball movements etc. Further, the handsets may optionally resynchronise to the data-stream by ensuring that the local controller waits a set time before it polls the next handset after it has received data or timed out whilst waiting for data from the current handset. Data such as requests for scores, position or control instructions can

be sent in the reverse direction as additional information in each poll sent out by the local controller. The handset optionally implements a toggled acknowledgement bit in response to a data poll in order to implement a secure link in the reverse direction.

[0051] In the context of a game, in one example, the central controller 1 would broadcast a game show and viewers who have a local controller 8 and handsets can play the game. Such a game might require the answering of questions by entering numbers on the key pad 15 and/or selecting options displayed on the monitor 12 by suitably positioning the cursor 14 and then pressing an enter button (not shown) on the key pad 15. In any event, this information is stored initially in the single chip microprocessor 17 and, when the handset is polled, transferred to the local controller 8 where it is again stored in the store 28. In the case of a cursor selection, the data from the handset 11 will cause suitable data to be stored in the video RAM 28 which is used to reposition the cursor on the display so that the user can see where he has positioned the cursor prior to pressing the enter button.

[0052] If the central controller 1 is to broadcast the correct answer to a question, then an operator at the central location can use a game terminal 5 to generate a lock-out signal which is broadcast by the central controller 1, each local controller 8 responding to receipt of the lock-out signal to prevent any further data being received from the handsets. This prevents a player entering the correct answer after he has viewed it on the monitor.

[0053] In some games, a score is allocated to a correct answer and this can be achieved by using a suitable programme to control operation of the microprocessor 26, or score information could be broadcast from the central controller 1. In any event, the local controller 8 will build up a record of scores from each handset 11 and store this for future use.

[0054] At the end of the game, the central controller 1 will control the return of game scores to it. For example, in order to reduce the amount of communication needed between each local controller 8 and the central controller 1, the central controller 1 could broadcast a score value, the microprocessor 26 in each local controller 8 responding to the received score value by comparing that score value with each stored score and only providing information about scores if they exceed the received score value. If they hold a score value exceeding the received score value then the microprocessor 26 causes the central controller 1 to be contacted via the PTN using the modem 32 and in response to suitable control instructions from the central controller 1, transmits the or each score together with the unique identifier of the handset in question.

[0055] The local controller 8 stores data relating to a score obtained by a particular user and at the end of a game the score may be transmitted to the central controller 1 if certain predefined conditions are satisfied, i.e.

if the player has got a sufficiently high score which he wishes to register. Scoring information may be transmitted to the central controller 1 by a direct telecomms link or via a data network. Communication with the central controller could equally be via a cable TV connection having two-way operation. The necessary score may be announced on the game show or automatically displayed on the display screen 12. The local controller may be adapted to automatically transmit the score if it exceeds a threshold value or it may require the user to activate the transfer himself such as by pushing a button on the handset to select a displayed function.

[0056] There are various ways in which the scores of the game can be transferred in a timely and cost effective manner to the central controller 1. An analysis of two methods to optimise the transmission of game scores is set out below. These methods are improvements on that described in an earlier published application number WO91/08810.

[0057] In the system of the present invention when used for game playing, there may be a large number of users playing interactive TV games from their homes and at the end of a game the central controller must determine which users have scored well enough in that game to win prizes. Transmissions may be sent from the central controller to users' homes to instruct the users' hardware, under certain circumstances, to send the users' score data to the central controller via a modem link (or other means of transmission). Under optimal circumstances the winners of a game may be determined quickly (within a few minutes) and with a minimal number of telephone calls being made via users' modems.

[0058] The method proposed in WO 91/08810 for determining which user scores should be transmitted to the central controller at the end of a game claims under certain circumstances, to allow the central controller to determine the top 100 scores by initiating only 790 telephone calls from a population of 100,000 units.

[0059] However, the assumptions made appear to be inappropriate since there would be a prohibitive time overhead in employing the method of WO 91/08810.

[0060] The prior art method assumes " ... that the units are selected one at a time completely random of their score...". While it is true that if the units are selected for testing one at a time, the expected number of telephone calls (790 from a population of 100,000 users) is very low, it is only possible to select the units one at a time if there is sufficient time to test all units sequentially. A reasonable assumption is that it will take approximately 20 seconds to select a unit, to transmit the unit's code number and have it received by the unit, to have the unit dial the central controller (if that unit's score is high enough to require transmission) and finally to have the unit send its score(s) to the central controller, then the estimated time required to do this with only 790 units is 263 minutes, against a target completion time for the task of 3-4 minutes.

[0061] In fact the problem is orders of magnitude larger than this, because each of the 790 units tested can be instructed to transmit its score only when it is known that all previous units have either transmitted their own scores or do not need to do so because their scores are not high enough. The central controller can not assume that a unit's score is not high enough for transmission until the time set aside for that unit to call the central controller has expired without any such call having been made). Thus, there would be insufficient time for the sequential selection and testing of 790 units.

[0062] Within the group of participating users a pre-determined number are to be designated as winners. Rather than test every score sequentially, the user's units are allocated to groups with each successive group intended to have more users than the previous group and with each selected unit within a group calling the central controller at or as close to the same moment in time as the number of telephone lines available for score transmission permits. A selection condition for including a particular unit in a group is that the particular unit's score(s) must be at least as high as that of the lowest current "leading winner". A leading winner is a player whose score has been transmitted and is currently in the leading group of scores and would be a winner if no further scores were transmitted. The two extreme cases within this method are:

- (i) Each group consists of 1 unit in which case the number of calls expected is optimal.
- (ii) There is only one group, consisting of the entire population, in which case every one of the units must call the central controller.

[0063] Clearly, the larger the number of groups selected the closer it is possible to get to optimality. Even with a relatively small number of groups the number of calls required is far closer to the optimal figure than it is to the worst case. Consider the following analysis in which 4 successive groups of 100, 1000, 10000 and 88900 (totalling 100000) are tested.

- a) First select 100 units since the example requires there to be 100 winners.
- b) The probability that the 101st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/101, so the expected number of calls to be made from the next group (1000 units) will be:

$$1000 \times (100 / 101) = 990 \text{ calls}$$

- c) The probability that the 1101st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/1101, so the expected number of calls to be made from the next group (10000 units) will be:

$$10000 \times (100 / 1101) = 908 \text{ calls}$$

d) The probability that the 11101th unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/11101, so the expected number of calls to be made from the final group (88900 units) will be:

$$88900 \times (100 / 11101) = 801 \text{ calls}$$

[0064] From the results of a), b), c) and d) it can be seen that the total number of calls required has been: $100 + 990 + 908 + 801 = 2,799$, compared to the 790 expected by the method described in WO91/08810.

[0065] It is possible that the total of 2,799 for 4 groups could be improved on by altering the number of units within each group. For example, rather than have groups b), c) and d) increase in size by a factor of 9 or 10 it may provide a lower total number of calls if there is no attempt to make the ratio between the size of groups b), c) and d) constant.

[0066] The number of groups will depend partly upon the total elapsed time allowed for testing. Given a target of 3-4 minutes this allows for 9-12 groups. The following analysis illustrates the magnitude of improvement to be expected when increasing the number of groups from 4 to 9. Using group sizes of 100, 400, 800, 1600, 3200, 6400, 12800, 25600 and 49100 (total 100000).

a) As before the first group consists of 100 units as there must be 100 winners.

b) The probability that the 101st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/101, so the expected number of calls to be made from the next group (400 units) will be:

$$400 \times (100 / 101) = 396 \text{ calls}$$

c) The probability that the 501st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/501, so the expected number of calls to be made from the next group (800 units) will be:

$$800 \times (100 / 501) = 160 \text{ calls}$$

d) The probability that the 1301st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/1301, so the expected number of calls to be made from the next group (1600 units) will be:

$$1600 \times (100 / 1301) = 123 \text{ calls}$$

e) The probability that the 2901st unit selected will have a score higher than that of at least one of the

already selected top 100 scores is 100/2901, so the expected number of calls to be made from the next group (3200 units) will be:

$$3200 \times (100 / 2901) = 110 \text{ calls}$$

f) The probability that the 6101st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/6101, so the expected number of calls to be made from the next group (6400 units) will be:

$$6400 \times (100 / 6101) = 105 \text{ calls}$$

g) The probability that the 12501st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/12501, so the expected number of calls to be made from the next group (12800 units) will be:

$$12800 \times (100 / 12501) = 102 \text{ calls}$$

h) The probability that the 25301st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/25301, so the expected number of calls to be made from the next group (25600 units) will be:

$$25600 \times (100 / 25301) = 101 \text{ calls}$$

i) The probability that the 50901st unit selected will have a score higher than that of at least one of the already selected top 100 scores is 100/50901, so the expected number of calls to be made from the next group (49100 units) will be:

$$49100 \times (100 / 50901) = 96 \text{ calls}$$

[0067] From the results of a), b), c) ... and i) it can be seen that the total expected number of calls required has been: $100 + 396 + 160 + 123 + 110 + 105 + 102 + 101 + 96 = 1,293$ compared to 2,799 when using only 4 groups rather than 9 and compared to the 790 expected by the method described in WO91/08810.

[0068] An initial assumption is that when testing starts at the end of a game, every home which has a unit may be playing that game. The sizes of the groups into which the total population should be split will be chosen accordingly, in such a way that the total number of groups will not be the cause of the system exceeding the target time for finding the winner(s).

[0069] The method described above assumes that the scores are randomly distributed with respect to the order in which they are examined.

[0070] In the worst case, if scores were always examined in ascending order of magnitude, every unit would need to call the central controller to report its result because at the moment of testing the score for a

unit that score would always be greater than that of all the scores examined thus far. The probability of this worst case arising is virtually nil, nevertheless it should be recognized that on some occasions the number of calls made will be considerably in excess of the expected number. The extent of this problem can be determined and in order to compensate for the problem the times at which calls are made to the central controller can be staggered in order to avoid overloading the telephone network.

[0071] In the best case the winners' scores would all be in the first group tested, whereupon no further telephone calls would be required. Clearly an improvement on randomness as a means of selecting the units in the first group will reduce the total number of calls required.

[0072] It is reasonable to assume that units which had previously transmitted high scores for a particular game would be more likely than randomly chosen units to transmit high scores on subsequent occasions when that game was played. Since the central controller will be keeping a log of all scores transmitted we should take advantage of this data. The central controller could maintain a ranking order for each unit for which a score had previously been transmitted in relation to a particular game, and the first group to be tested for a subsequent occurrence of the game would be chosen from the top of this ranking order.

[0073] Given that the proportion of previously ranked units participating on any particular occasion is not known, then to select (say) 100 units for the first group it might be necessary to instruct (say) 200 units to call the central controller, assuming that only half the ranked units were participating. The exact algorithm to be used for determining the number of units in the first group can be determined from a consideration of playing frequency patterns. Initially it is necessary to make an intelligent guess.

[0074] A statistical approach, consisting of collecting the scores for a number of randomly chosen units and plotting a curve of these scores against their frequency, could be used as the basis for a rating system in which every player could have a rating, reflecting their performance in a particular TV programme as well as their cumulative performance over several programmes of the same game, or several programmes of different games.

[0075] If it is decided to use a curve sampling method as described in WO91/08810 then clearly selection of the first 2,000 units must be at random if we wish to achieve an accuracy of $95\% \pm 2\%$. If the number of units selected is significantly different from 2000, this accuracy would change. In this case the highest scorers from previous programmes for this game would be tested as with the first part of the same group as that containing the randomly chosen 2,000, and the top score(s) of the entire group would then be used as the minimum score for selection within the next group. This

would have some advantage in allowing the test procedure to home in on the highest scores with fewer calls from the second and subsequent groups tested, but the cost would be the increased number of calls incurred from the 2,000 randomly chosen units within the first group tested.

[0076] A different method is described below.

[0077] The range of possible scores is divided into a number of score groups and, starting with the highest score group, users' hardware are instructed to transmit the data for all users whose scores lie within a particular group. This method has the advantage that the winner's score will be found very early in the score transmission process.

[0078] The assumption is made that the scores lie in the range 0-1,000 and that the number of telephone lines is at least as great as the number of winners required. It is sensible to create the score groups in such a way as to avoid having a large number of users with scores in the top group(s), hence a suitable division into score groups might be:

Group 1	score = 1,000	(1 score)
Group 2	score = 998-999	(2 scores)
Group 3	score = 994-997	(4 scores)
Group 4	score = 986-993	(8 scores)
Group 10	score = 0-489	

[0079] The first iteration requires all users (if any) with scores of 1,000 to transmit their scores. There should be a short delay after this instruction is transmitted before the next score group is accessed, otherwise a difference in dial-up and connect times could cause at least some users from Group 2 to have their scores transmitted before those from Group 1. A delay of 2-3 seconds should probably be sufficient.

[0080] At some stage during the process a score group will be accessed which contains more users than the number required to complete the list of winners. There is no way of knowing which score group this will be until the total number of calls reaches the number of winners required. Typically, if the number of telephone lines in use is the same as the number of winners required, the central controller should be programmed to detect an "all lines busy" condition and then abort all instructions to access lower score groups - the score group for which the "all lines busy" condition first occurs is the lowest score group which needs to be accessed. This score group can be called the "lowest score group".

[0081] Once the "all lines busy" condition has been detected and acted upon, the remaining users who are winners and whose scores lie within the lowest score group must be identified. The scores of a number of

winners and potential winners are already available, but there will almost certainly exist within the lowest score group some other users whose scores have:

- a) not yet been transmitted; and,
- b) are greater than or equal to those of some of the potential winners already identified.

[0082] The only users whose scores need to be investigated are those who lie within the lowest score group. There will, however, be some occasions when a very large number of users have scores within the lowest score group. One way to address this problem would be to instruct score transmission for the highest score within the group, then the next highest score, and so on, until all the winners had been identified. Again, the "all lines busy" condition could be used to determine the lowest score that can be achieved by a winner.

[0083] Even allowing for a delay of a couple of seconds or so between accesses to successively lower scores, and even when there are 100 or more scores within the lowest score group, it is unlikely that the delay in completing the process would be more than a few minutes.

[0084] This method appears to be both efficient in terms of identifying the overall winner and economical in the number of telephone calls required to identify all the winners (probably no worse than twice the number of winners).

[0085] As well as broadcast game playing uses, game playing where two or more players or teams of players at different remote locations wish to compete directly can be achieved. The central controller can simply act as a conduit or take a closer controlling role such as determining the pairings for the next round of a competition between players or teams, when results from each contest are sent to the central controller.

[0086] Although the examples given relate to a game playing system, the local controller and handsets may have other applications. For example, placing of bets for various sporting events where information is fed back from the viewers local handsets via the local controller to the central controller and then onto a third party to receive bets placed against a list of odds which have been broadcast together with or separate from other broadcast data.

[0087] Another use is for polling viewers during a mass broadcast programme such as a news or current events programme.

[0088] A further application relates to the advertisement of goods and services. For example, a broadcast advertisement can be displayed on the monitor 12 and by suitably using the cursor 14 and key pad 15, a viewer could request further information about the product or service advertised, the request being transmitted via the modem 32 to the central controller 1 where it is stored or passed on to the advertiser. In a particular example, if the viewer wishes to order a product such as

a pizza then the central controller generates a menu on the monitor 12 and the viewer uses the cursor 14 and keypad 15 to select a particular pizza from the menu. This request is fed back via the local controller and central controller to the pizza company. Similarly clothes can be ordered from an on-screen catalogue and an order for the item to be delivered to a given address, to the address registered to the local controller or to be held for collection, can be transmitted from the user's local controller to that of the third party. Alternatively, the user can communicate with a shop assistant to discover what products they have and make enquiries, such as obtaining advice on accessories and colour matches. The shop assistant will be able to respond via their own handset and local controller. The use of multiple handsets in the shop permits several staff to deal with questions simultaneously via one local controller.

Claims

1. An interactive system for use with mass media broadcasts, the system comprising a local controller (8) operable to control data flow to and from at least two local handsets (11,21) for generating data, the local controller (8) including a store (28) for storing data and processing means (26); a central controller (1) for broadcasting data to the local controller (8), the local controller being connectable to the central controller (1) to communicate data to the central controller; and a display (12) for displaying locally both the mass media broadcast from the central controller and data received from the local controller; wherein the local controller (8) stores data generated by each local handset (11,21) and selectively transfers stored data to the central controller (1).
2. A system according to claim 1, wherein the processing means of the local controller (8) is adapted to address each local handset (11,22) sequentially in accordance with a predetermined schedule to obtain data from that handset.
3. A system according to claim 2, wherein the predetermined schedule requires each handset (11,22) to be addressed for an equal time period.
4. A system according to any preceding claim, wherein the local controller store (28) is adapted to store data supplied from the central controller (1).
5. A system according to any preceding claim, wherein a unique identifier by which each handset (11,21) is addressed is allocated during the first use of a handset within the system or thereafter.
6. A system according to any preceding claim, wherein the local controller (8) and central control-

ler (1) are connectable via one of a telecomms link, and a data distribution network.

7. A system according to any preceding claim, wherein the central controller (1) broadcasts video and text data for reception by the local controller (8) and for display on the display (12). 5
8. A system according to any preceding claim, wherein transfer of data between each handset (11,21) and the local controller (8) is via an infrared link. 10
9. A system according to any preceding claim, wherein the processing means (26) of the local controller (8) selectively transfers data to the central controller (1) only if a predetermined transfer condition is met. 15
10. A system according to claim 9, wherein the predetermined transfer condition comprises exceeding a predetermined score value at the end of a game play period. 20
11. A system according to any of the preceding claims, wherein the processing means of the local controller (8) only transmits data to the central controller in response to a command from the central controller. 25
12. A system according to claim 11, when dependent on claim 7, wherein the command is broadcast by the central controller along with the video and text data. 30
13. A system according to any preceding claim, wherein a second local controller operable to control data flow to and from respective second handsets is provided, such that data may be transferred between the first (8) and second local controllers via the central controller (1). 35
14. A system according to any preceding claim, comprising one of a game playing system, a purchase system, and an information system. 40
15. A system according to any of the preceding claims, wherein each handset (11,21) comprises a transmitter and a receiver (9) for transfer of data from the handset (11,21) to the local controller (8) and from the local controller (8) to the handset; input means to input data for controlling the output of the display via the local controller, the input means comprising a cursor control (54) laterally movable over a plane (52), means for sensing the position of the cursor control within the plane (36) and for causing a corresponding cursor displayed on the display (12) to take up a similar position; and, processing means for processing data from the local controller and 55

data from the input means and wherein the processing means controls the transfer of data to the local controller in accordance with the data from the local controller and the input means.

16. A system according to claim 15, wherein the sensing means (38,41) monitor a change in potential difference with a change in position of the cursor control (33).
17. A system according to claim 15 or claim 16, wherein the system is one of a game playing system, a purchase system and an information system.
18. A method of operating an interactive system for playing a game according to any of the preceding claims, the method comprising broadcasting first data from the central controller whereby the local controller responds by causing the display to display the broadcast first data; storing second data in the local controller obtained from each local handset relating to the first data; displaying locally data received from the local controller and selectively transferring the stored second data to the central controller if predetermined conditions are satisfied.
19. A method according to claim 18, wherein the first data comprises game playing information and the second data comprises data relating to the playing of the game.
20. A method according to claim 19, wherein the predetermined conditions are supplied to the local controller by the central controller as part of the game playing information broadcast.
21. A method according to claim 19 or claim 20, wherein the predetermined conditions include a minimum score value, the local controller comparing each stored score with the minimum score value and only transferring a stored score to the central controller if the stored score is the same as or exceeds the minimum score value.
22. A method according to any of claims 19-21, wherein the central controller maintains a ranking order for units which have previously recorded scores and defines an upper portion of the ranking order from which units are chosen to transmit their scores.
23. A method according to any of claims 19-21, wherein the control controller allows a first group of scores to be transmitted, then sets one or more further group sizes until the desired number of scores which comply with the predetermined condition is achieved.

Patentansprüche

1. Interaktives System zur Verwendung bei Übertragungen durch Massenmedien, mit einer lokalen Steuereinrichtung (8), die sich zur Steuerung eines Datenflusses zu und von mindestens zwei lokalen Handgeräten (11, 21) zur Erzeugung von Daten betreiben läßt und einen Speicher (28) zum Speichern von Daten und eine Verarbeitungseinrichtung (26) aufweist, mit einer zentralen Steuereinrichtung (1) zum Übertragen von Daten zu der lokalen Steuereinrichtung (8), wobei die lokale Steuereinrichtung sich mit der zentralen Steuereinrichtung (1) verbinden läßt, um mit der zentralen Steuereinrichtung Daten auszutauschen, und mit einer Anzeigevorrichtung (12) zum lokalen Anzeigen von beidem, der Übertragung durch Massenmedien von der zentralen Steuereinrichtung aus und von Daten, die von der lokalen Steuereinrichtung empfangen werden, wobei die lokale Steuereinrichtung (8) Daten speichert, die von jedem lokalen Handgerät (11, 21) erzeugt werden, und selektiv gespeicherte Daten zu der zentralen Steuereinrichtung (1) überträgt.
2. System nach Anspruch 1, bei dem die Verarbeitungseinrichtung der lokalen Steuereinrichtung (8) angepaßt ist, sequenziell jedes lokale Handgerät (11, 22) gemäß einem vorbestimmten Zeitplan anzusprechen, um Daten von dem Handgerät zu erhalten.
3. System nach Anspruch 2, bei dem der vorbestimmte Zeitplan es für jedes Handgerät (11, 22) erfordert, für eine gleiche Zeitdauer angesprochen zu werden.
4. System nach irgendeinem vorhergehenden Anspruch, bei dem der Speicher (28) der lokalen Steuereinrichtung angepaßt ist, Daten, die von der zentralen Steuereinrichtung (1) geliefert werden, zu speichern.
5. System gemäß irgendeinem vorhergehenden Anspruch, bei dem eine einzelne Kennung, von der jedes Handgerät (11, 21) angesprochen wird, während einer ersten Benutzung eines Handgeräts innerhalb des Systems oder danach zugeteilt wird.
6. System gemäß irgendeinem vorhergehenden Anspruch, bei dem die lokale Steuereinrichtung (8) und die zentrale Steuereinrichtung (1) über eine Telekommunikationsverknüpfung oder ein Datenverteilungsnetzwerk miteinander verbindbar sind.
7. System gemäß irgendeinem vorhergehenden Anspruch, bei dem die zentrale Steuereinrichtung (1) Video- und Textdaten für einen Empfang durch die lokale Steuereinrichtung (8) und für eine Anzeige auf der Anzeigevorrichtung (12) überträgt.
8. System gemäß irgendeinem vorhergehenden Anspruch, bei dem die Übertragung von Daten zwischen jedem Handgerät (11, 21) und der lokalen Steuereinrichtung (8) über eine Infrarot-Verbindung erfolgt.
9. System gemäß irgendeinem vorhergehenden Anspruch, bei dem die Verarbeitungseinrichtung (26) der lokalen Steuereinrichtung (8) nur dann selektiv Daten zu der zentralen Verarbeitungseinrichtung (1) überträgt, wenn eine vorbestimmte Übertragungsbedingung erfüllt ist.
10. System gemäß Anspruch 9, bei dem die vorherbestimmte Übertragungsbedingung ein Überschreiten eines vorbestimmten Punktestandes am Ende einer Dauer zum Spielen eines Spiels umfaßt.
11. System gemäß irgendeinem der vorhergehenden Ansprüche, bei dem die Verarbeitungseinrichtung der lokalen Steuereinrichtung (8) nur aufgrund eines Befehls von der zentralen Steuereinrichtung Daten zu der zentralen Steuereinrichtung überträgt.
12. System gemäß Anspruch 11, soweit abhängig von Anspruch 7, bei dem der Befehl von der zentralen Steuereinrichtung zusammen mit den Video- und Textdaten übertragen wird.
13. System gemäß irgendeinem vorhergehenden Anspruch, bei dem eine zweite lokale Steuereinrichtung vorgesehen ist, die sich zum Steuern eines Datenflusses zu und von jeweiligen zweiten Handgeräten betreiben läßt, so daß Daten zwischen der ersten (8) und der zweiten lokalen Steuereinrichtung über die zentrale Steuereinrichtung (1) übertragen werden können.
14. System gemäß irgendeinem vorhergehenden Anspruch, umfassend ein System zum Spielen eines Spiels, ein Verkaufssystem oder ein Informationssystem.
15. System gemäß irgendeinem der vorhergehenden Ansprüche, bei dem jedes Handgerät (11, 21) aufweist: einen Sender und einen Empfänger (9) zum Übertragen von Daten von dem Handgerät (11, 21) zu der lokalen Steuereinrichtung (8) und von der lokalen Steuereinrichtung (8) zu dem Handgerät, Eingabemittel zum Eingeben von Daten zum Steuern der Ausgabe der Anzeigeeinrichtung über die lokale Steuereinrichtung, wobei die Eingabemittel eine Zeigersteuerung (54), die seitlich über eine Ebene (52) beweglich ist, Mittel zum Abtasten der

- Position der Zeigersteuerung innerhalb der Ebene (36) und zum Bewirken eines entsprechenden Zeigers, der auf der Anzeigeeinrichtung (12) zur Einnahme einer ähnlichen Position angezeigt wird, und Verarbeitungsmittel zum Verarbeiten von Daten von der lokalen Steuereinrichtung und von Daten von den Eingabemitteln, wobei die Verarbeitungseinrichtung die Übertragung von Daten zu der lokalen Steuereinrichtung gemäß den Daten von der lokalen Steuereinrichtung und den Eingabemitteln steuert.
16. System gemäß Anspruch 15, bei dem die Abtasteinrichtung (38) eine Änderung bezüglich der Potentialdifferenz mit einer Änderung in der Position der Zeigersteuerung (33) überwacht.
17. System gemäß Anspruch 15 oder Anspruch 16, bei dem das System ein System zum Spielen eines Spiels, ein Verkaufssystem oder ein Informationssystem ist.
18. Verfahren zum Betreiben eines interaktiven Systems zum Spielen eines Spiels gemäß irgendeinem der vorhergehenden Ansprüche, wobei das Verfahren umfaßt: ein Übertragen erster Daten von der zentralen Steuereinrichtung, wodurch die lokale Steuereinrichtung dadurch anspricht, daß sie bewirkt, daß die Anzeigeeinrichtung die übertragenen ersten Daten anzeigt, ein Speichern zweiter Daten in der lokalen Steuereinrichtung, die von jedem lokalen Handgerät in Bezug auf die ersten Daten erhalten werden, ein Anzeigen lokaler Daten, die von der lokalen Steuereinrichtung empfangen werden, und ein selektives Übertragen der gespeicherten zweiten Daten zu der zentralen Steuereinrichtung, wenn vorbestimmte Bedingungen erfüllt sind.
19. Verfahren nach Anspruch 18, bei dem die ersten Daten Informationen zum Spielen eines Spiels und die zweiten Daten Daten, die sich auf das Spielen des Spiels beziehen, umfassen.
20. Verfahren gemäß Anspruch 19, bei dem die vorbestimmten Bedingungen der lokalen Steuereinrichtung von der zentralen Steuereinrichtung als Teil der Übertragung der Informationen zum Spielen eines Spiels zur Verfügung gestellt werden.
21. Verfahren gemäß Anspruch 19 oder Anspruch 20, bei dem die vorbestimmten Bedingungen einen minimalen Punktestand umfassen, wobei die lokale Steuereinrichtung jeden gespeicherten Punktwert mit dem minimalen Punktwert vergleicht und nur einen gespeicherten Punktwert zu der zentralen Steuereinrichtung überträgt, wenn der gespeicherte Punktwert derselbe wie der minimale

Punktestand ist oder diesen übertrifft.

22. Verfahren gemäß irgendeinem der Ansprüche 19 bis 21, bei dem die zentrale Steuereinrichtung eine Rangfolge für Einheiten aufrechterhält, die zuvor aufgezeichnete Punktwerte haben, und einen oberen Abschnitt der Rangfolge definiert, aus dem Einheiten ausgewählt werden, ihre Punktwerte zu übertragen.
23. Verfahren gemäß irgendeinem der Ansprüche 19 - 21, bei dem die zentrale Steuereinrichtung es gestattet, daß eine erste Gruppe von Punkten übertragen wird, dann eine oder mehrere weitere Gruppengrößen festsetzt, bis die gewünschte Zahl an Punkten, die die vorbestimmte Bedingung erfüllt, erreicht ist.

Revendications

1. Système interactif pour utilisation dans des émissions grand public, le système comprenant un contrôleur local (8) pouvant être utilisé pour contrôler un flux de données vers et en provenance d'au moins deux combinés de jeu locaux (11, 21) pour générer des données, le contrôleur local (8) comprenant une mémoire (28) pour mémoriser des données et un moyen de traitement (26) ; un contrôleur central (1) pour diffuser des données au contrôleur local (8), le contrôleur local pouvant être connecté au contrôleur central (1) pour communiquer des données au contrôleur central ; et un dispositif d'affichage (12) pour afficher localement à la fois l'émission grand public provenant du contrôleur central et les données reçues du contrôleur local ; dans lequel le contrôleur local (8) mémorise les données générées par chaque combiné de jeu local (11, 21) et transfère sélectivement les données mémorisées au contrôleur central (1).
2. Système selon la revendication 1, dans lequel le moyen de traitement du contrôleur local (8) est conçu de façon à adresser chaque combiné de jeu local (11, 22) séquentiellement selon un ordonnancement prédéterminé, pour obtenir les données provenant de ce combiné de jeu.
3. Système selon la revendication 2, dans lequel l'ordonnancement prédéterminé nécessite que chaque combiné de jeu (11, 22) soit adressé pendant une période de temps égale.
4. Système selon l'une quelconque des revendications précédentes, dans lequel la mémoire du contrôleur local (28) est conçue de façon à mémoriser des données fournies par le contrôleur central (1).
5. Système selon l'une quelconque des revendica-

- tions précédentes, dans lequel un identificateur unique, au moyen duquel chaque combiné de jeu (11, 21) est adressé, est attribué lors de la première utilisation d'un combiné de jeu à l'intérieur du système ou après celle-ci.
6. Système selon l'une quelconque des revendications précédentes, dans lequel le contrôleur local (8) et le contrôleur central (1) peuvent être connectés par l'intermédiaire d'un moyen tel qu'une liaison de télécommunication ou un réseau de distribution de données.
 7. Système selon l'une quelconque des revendications précédentes, dans lequel le contrôleur central (1) diffuse des données vidéo et de texte pour réception par le contrôleur local (8) et pour affichage sur le dispositif d'affichage (12).
 8. Système selon l'une quelconque des revendications précédentes, dans lequel le transfert de données entre chaque combiné de jeu (11, 21) et le contrôleur local (8) s'effectue par l'intermédiaire d'une liaison infrarouge.
 9. Système selon l'une quelconque des revendications précédentes, dans lequel le moyen de traitement (26) du contrôleur local (8) ne transfère sélectivement des données au contrôleur central (1) que si une condition de transfert prédéterminée est satisfaite.
 10. Système selon la revendication 9, dans lequel la condition de transfert prédéterminée comprend le dépassement d'une valeur de score prédéterminée à la fin d'une période de jeu.
 11. Système selon l'une quelconque des revendications précédentes, dans lequel le moyen de traitement du contrôleur local (8) ne transmette des données au contrôleur central qu'en réponse à une commande provenant du contrôleur central.
 12. Système selon la revendication 11, lorsqu'elle dépendant de la revendication 7, dans lequel la commande est diffusée par le contrôleur central en même temps que les données vidéo et de texte.
 13. Système selon l'une quelconque des revendications précédentes, dans lequel un second contrôleur local pouvant être mis en oeuvre pour contrôler un flux de données vers et en provenance de seconds combinés de jeu respectifs est utilisé, de sorte que des données peuvent être transférées entre les premier (8) et second contrôleurs locaux par l'intermédiaire du contrôleur central (1).
 14. Système selon l'une quelconque des revendica-
- tions précédentes, comprenant un système parmi un système pour jouer à un jeu, un système d'achat et un système d'informations.
15. Système selon l'une quelconque des revendications précédentes, dans lequel chaque combiné de jeu (11, 21) comprend un transmetteur et un récepteur (9) pour le transfert de données depuis le combiné de jeu (11, 21) au contrôleur local (8) et depuis le contrôleur local (8) au combiné de jeu ; des moyens d'entrée pour entrer des données pour contrôler la sortie du dispositif d'affichage par l'intermédiaire du contrôleur local, les moyens d'entrée comprenant une commande de curseur (54) mobile latéralement dans un plan (52), des moyens pour acquérir la position de la commande du curseur à l'intérieur du plan (36) et pour amener le curseur correspondant affiché sur le dispositif d'affichage (12) à prendre une position similaire ; et, un moyen de traitement pour traiter les données provenant du contrôleur local et les données provenant des moyens d'entrée et dans lequel le moyen de traitement commande le transfert des données au contrôleur local selon les données provenant du contrôleur local et des moyens d'entrée.
 16. Système selon la revendication 15, dans lequel les moyens d'acquisition (38, 41) surveillent un changement de différence de potentiel avec un changement de position de la commande de curseur (33).
 17. Système selon la revendication 15 ou la revendication 16, dans lequel le système est un système parmi un système pour jouer à un jeu, un système d'achat et un système d'informations.
 18. Procédé de mise en oeuvre d'un système interactif pour jouer à un jeu selon l'une quelconque des revendications précédentes, le procédé comprenant la diffusion de premières données provenant du contrôleur central, de façon à ce que le contrôleur local réagisse en amenant le dispositif d'affichage à afficher les premières données diffusées ; la mémorisation de secondes données dans le contrôleur local obtenues à partir de chaque combiné de jeu local, concernant les premières données ; l'affichage local des données reçues du contrôleur local ; et le transfert sélectif des secondes données mémorisées au contrôleur central si des conditions prédéterminées sont satisfaites.
 19. Procédé selon la revendication 18, dans lequel les premières données comprennent des informations pour jouer à un jeu et les secondes données comprennent des données se rapportant au déroulement du jeu.
 20. Procédé selon la revendication 19, dans lequel les

conditions prédéterminées sont fournies au contrôleur local par le contrôleur central comme élément de la diffusion d'informations de déroulement de jeu.

5

21. Procédé selon la revendication 19 ou la revendication 20, dans lequel les conditions prédéterminées comprennent une valeur minimale de score, le contrôleur local comparant chaque score mémorisé à la valeur minimale de score et ne transférant un score mémorisé au contrôleur central que si le score mémorisé est le même que la valeur de score minimale ou dépasse cette dernière.

10

22. Procédé selon l'une quelconque des revendications 19 à 21, dans lequel le contrôleur central maintient un ordre de classement pour les unités qui ont précédemment enregistré des scores, et définit une partie supérieure de l'ordre de classement depuis laquelle des unités sont choisies pour transmettre leurs scores.

15

20

23. Procédé selon l'une quelconque des revendications 19 à 21, dans lequel le contrôleur central permet la transmission d'un premier groupe de scores, fixe ensuite une ou plusieurs tailles de groupes supplémentaires, jusqu'à ce que le nombre souhaité de scores qui satisfont à la condition prédéterminée soit atteint.

25

30

35

40

45

50

55

Fig.1.

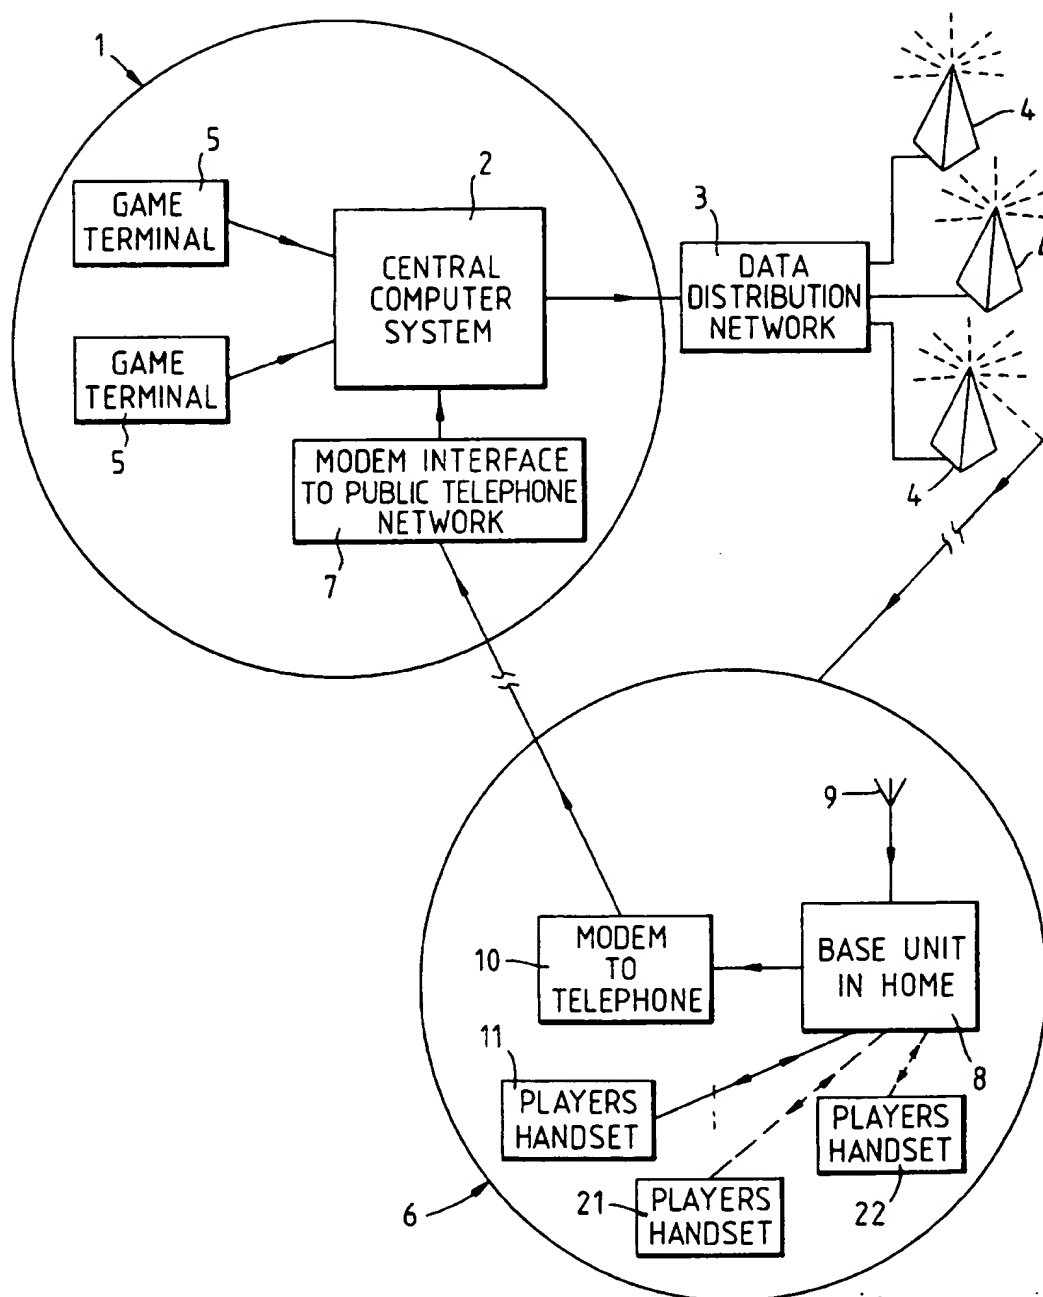


Fig.2.

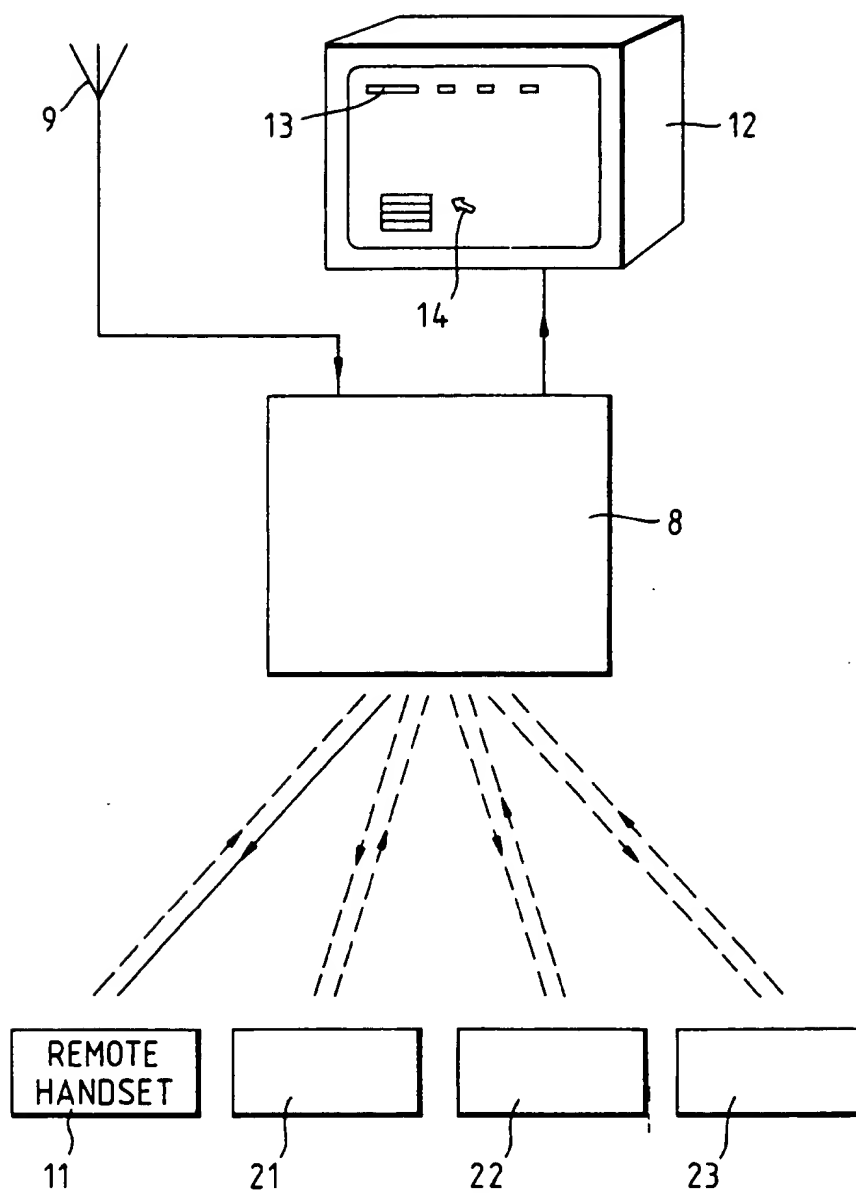


Fig.3.

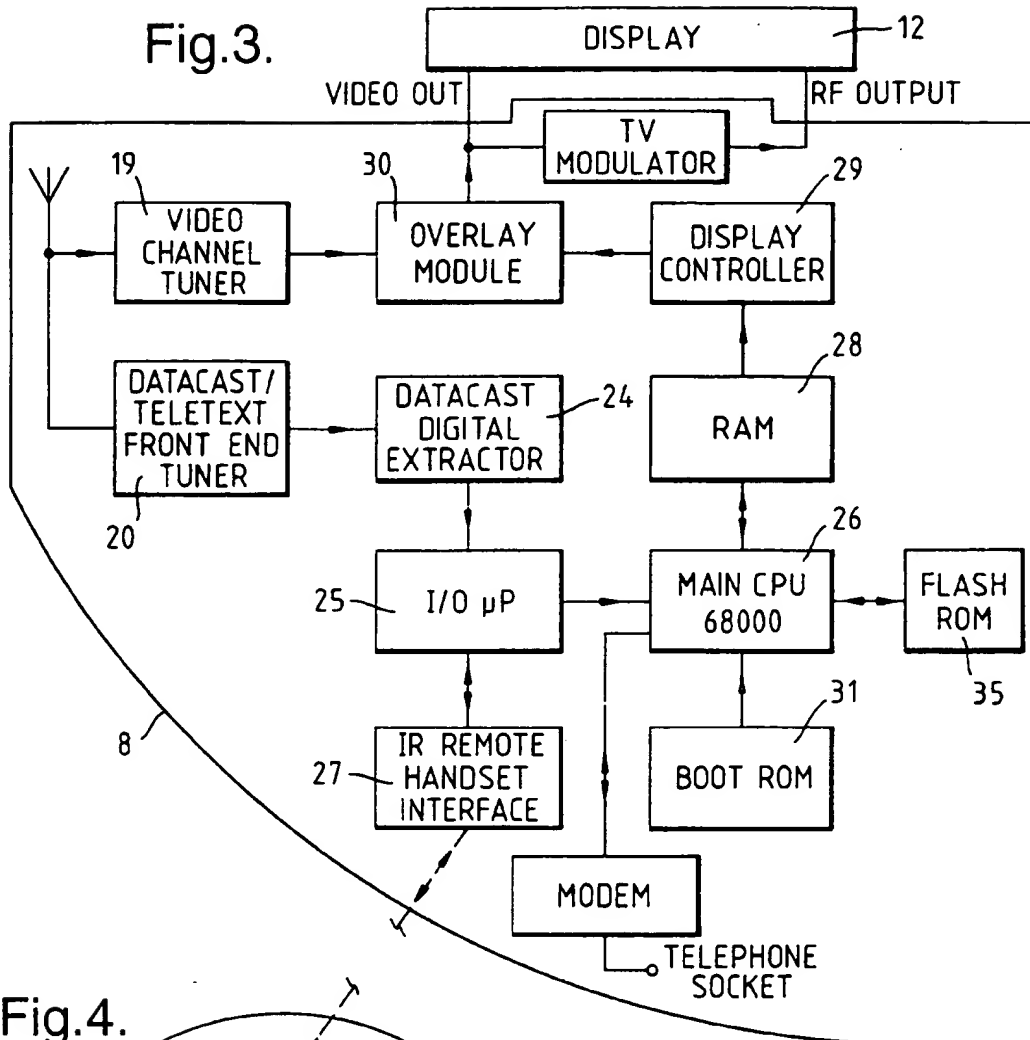


Fig.4.


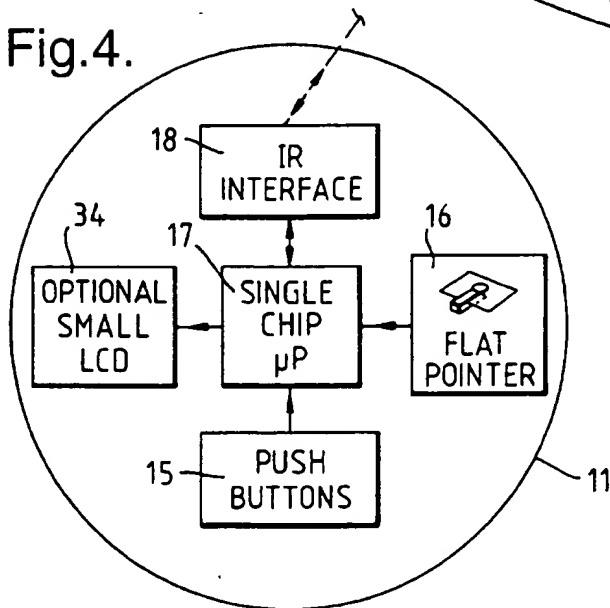


Fig.5.

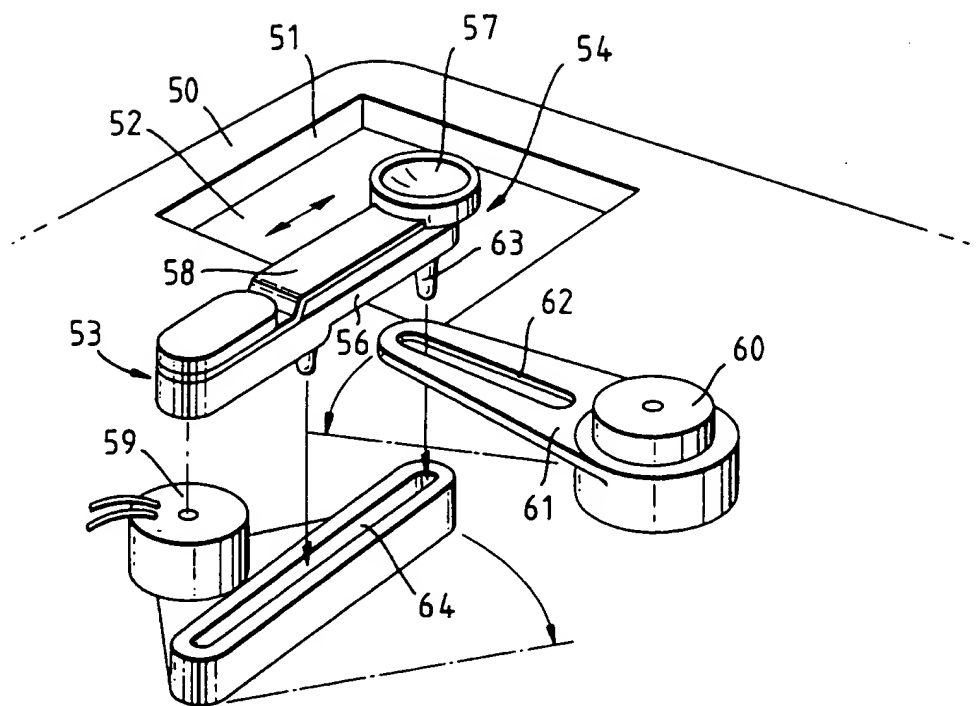

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.